


**NOBEL 55-13 PM-DF**

## Screw compressor with direct drive transmission and permanent magnet motor with inverter.

Lubricated screw compressor with coaxial transmission, permanent magnet motor and inverter control. LOGIN electronic controller. Silent with integrated dryer complete with prefilter and microfilter

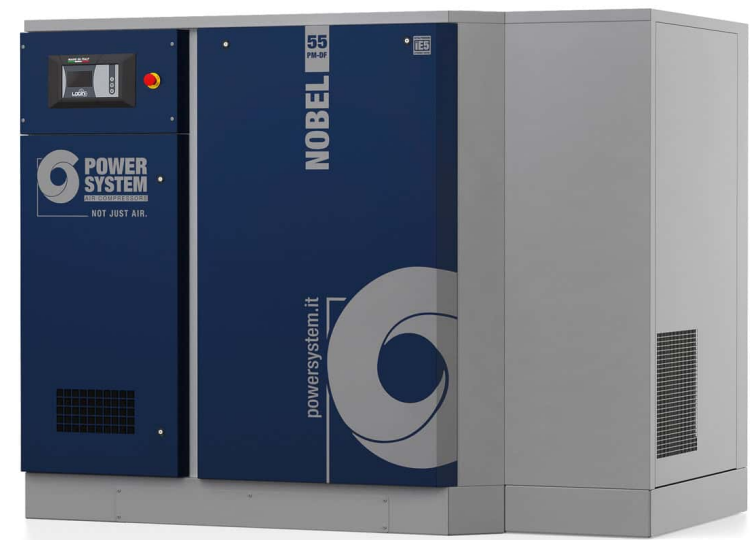

### TECHNICAL DATA

Product code	V60GF97PWSB87	
Lubrication	Lubricated	
Air-end	FS270	
Air receiver (l)	-	
Power	55	
Air outflow	l/min.	1750 / 7400
	m3/min.	1.75 / 7.4
	c.f.m.	62 / 261
Max. pressure	bar	13
	p.s.i.	189
Nr. of stages	1	
Sound level (dB(A))	72	
Voltage / Frequency (Volt / Hz)	400/50	
Connection (G)	2"	
Controller	LOGIN	
Type motor	Permanent magnet electric motor	
Energy efficiency	IE5	
Gross weight (kg)	1351	
Net weight (kg)	1236	
Packaging dimensions LxWxH (mm)	2420x1420x1960	
Net Dimensions LxWxH (mm)	2260x1270x1700	

\*Sound pressure level measurement carried out at a distance of 7 metres.