


**NOBEL 2S 250-10 DV**

## Highly efficient, two-stage screw compressor, with direct drive transmission and inverter.

two-stage lubricated screw compressor with coaxial drive and inverter-controlled speed regulation. radial fan with inverter control. LOGIN electronic controller. Also available with integrated heat recovery exchanger.

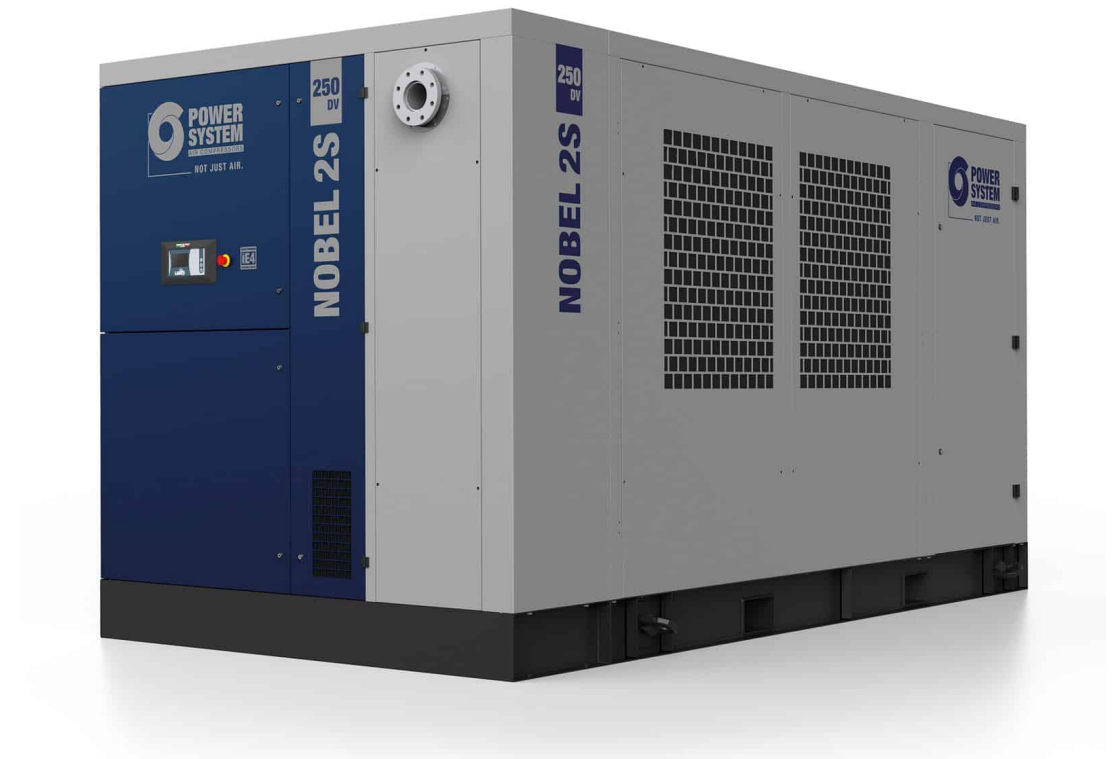

### TECHNICAL DATA

Product code	V60ZV97PWSA87	
Lubrication	Lubricated	
Power	250	
Air outflow	l/min.	14883 / 45100
	m3/min.	14.88 / 45.1
	c.f.m.	526 / 1593
Max. pressure	bar	10
	p.s.i.	145
Nr. of stages	2	
Sound level (dB(A))	79	
Voltage / Frequency (Volt / Hz)	400/50	
Connection (G)	DN100	
Controller	Login	
Type motor	Electric	
Energy efficiency	IE4	
Gross weight (kg)	8440	
Net weight (kg)	9100	
Packaging dimensions LxWxH (mm)	4350x2250x2450	
Net Dimensions LxWxH (mm)	4350x2250x2450	

\*Sound pressure level measurement carried out at a distance of 7 metres.